


Four-way Cassette

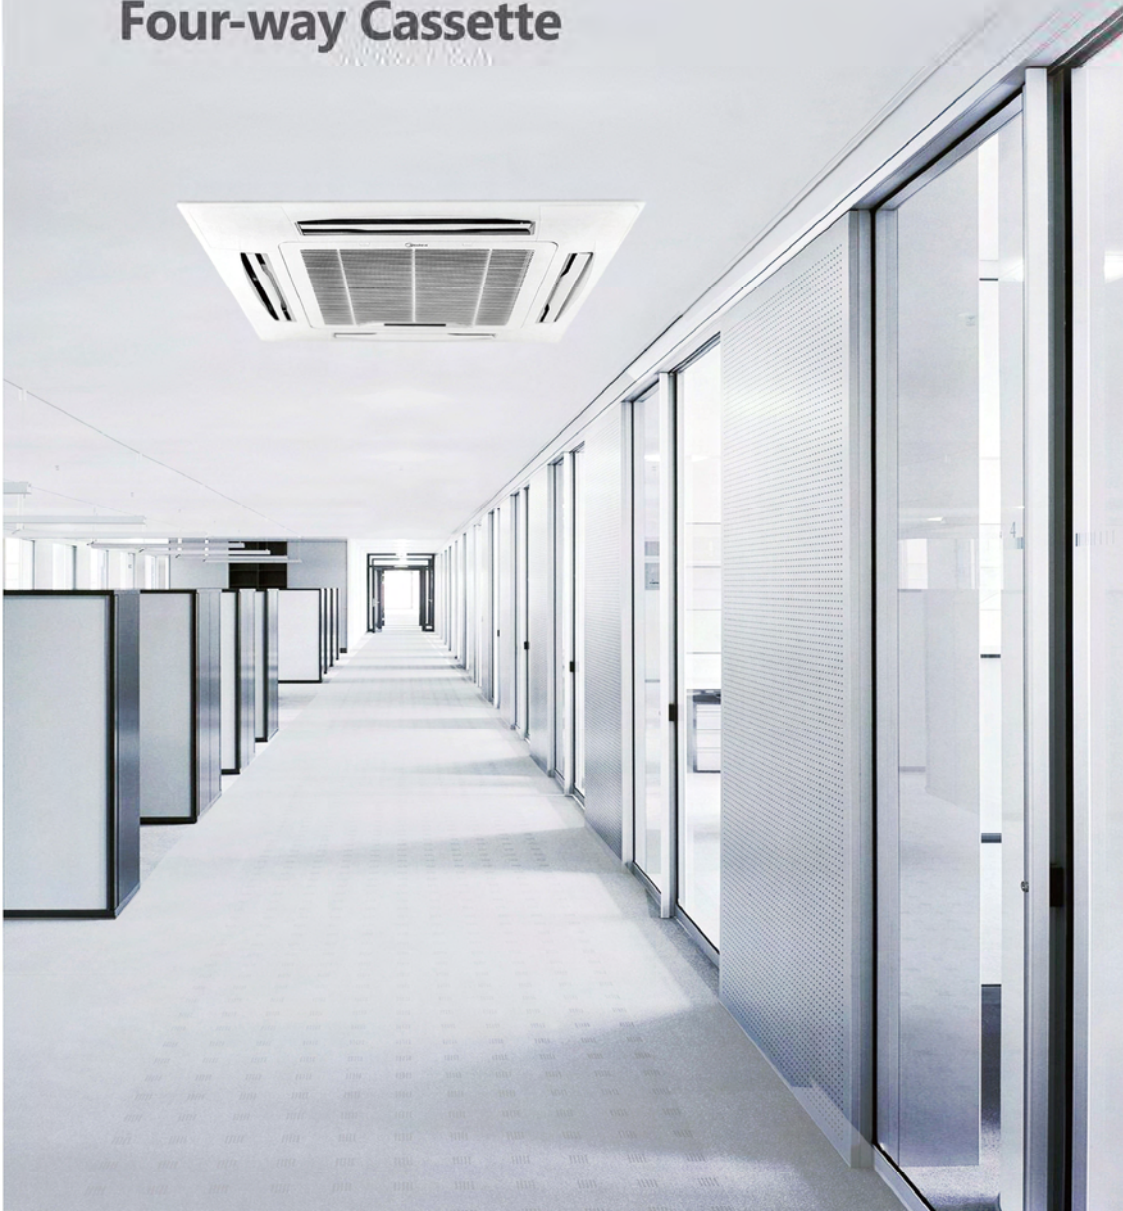

Four-way Cassette

Features

- Auto Defrosting
- Auto Restart Function
- Anti-Cold Air Function
- LED Display
- Sleep Mode
- Independent Dehumidification
- Slim Design
- Wide-angle Air flow
- Quiet Design
- Timer
- Fresh Air
- Built-in Drain Pump

Specification_Four-way Cassette

Indoor Unit		MCC-24HRDN1	MCC-36HRDN1	MCC-48HRDN1	MCC-60HRDN1
Outdoor Unit		MOU-24HDN1	MOU-36HDN1-Q/R	MOU-48HDN1	MOU-60HDN1
Cooling Capacity	Btu/h	24000	36000	48000	60000
	kW	7.0	10.6	14.1	17.6
Heating Capacity	Btu/h	26000	37000	51000	60000
	kW	7.6	10.8	14.9	17.6
Power Supply	V~, Hz, Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power Input (W)	Cooling	2180	3280	4400.00	5410
	Heating	2060	3000	4150.00	4885
EER	W/W	3.2	3.2	3.2	3.3
COP	W/W	3.7	3.6	3.6	3.6
Air Flow Volume	m ³ /h	1327/1114/871	1545/1354/1187	1545/1354/1187	1800/1480/1280
Noise Level (dB(A))	Hi/Med/Low	42/40.5/39	44/42/41	44/42.5/41	47/44/43
Net Dimension (mm)	Body (W×H×D)	840×230×840	840×300×840	840×300×840	840×300×840
	Panel (W×H×D)	950×55×950	950×55×950	950×55×950	950×55×950
Net Weight (kg)	Body	24	30	31	32
	Panel	5	5	5	5
Packing Dimension (mm)	Body (W×H×D)	900×250×900	900×320×900	900×320×900	900×320×900
	Panel (W×H×D)	1035×90×1035	1035×90×1035	1035×90×1035	1035×90×1035
Gross Weight (kg)	Body	28.3	33.5	35	35
	Panel	8	8	8	8
Piping Size (mm)	Liquid	Φ9.52(3/8")	Φ9.52(3/8")	Φ9.52(3/8")	Φ9.52(3/8")
	Gas	Φ15.9(5/8")	Φ15.9(5/8")	Φ15.9(5/8")	Φ15.9(5/8")
	Drainage	ODΦ32	ODΦ32	ODΦ32	ODΦ32
Refrigerant		R410a	R410a	R410a	R410a

1.The above design and specifications are subject to change of product improvement without prior notice .
2.The noise level data reflects the level in anechoic chamber .

Dealer Details: