

## Ceiling & Floor

### Features

- Anti-Cold Air Function
- Auto Restart Function
- Auto Defrosting
- Timer
- Quiet Design
- Independent Dehumidification
- Sleep Mode


## Ceiling & floor

### Swing Torsion Angles

The unit has auto horizontal swing and auto vertical swing function, which supplies more even and comfortable airflow.

### Flexible Installation

The unit can be installed either horizontally on the ceiling or vertically against the wall.

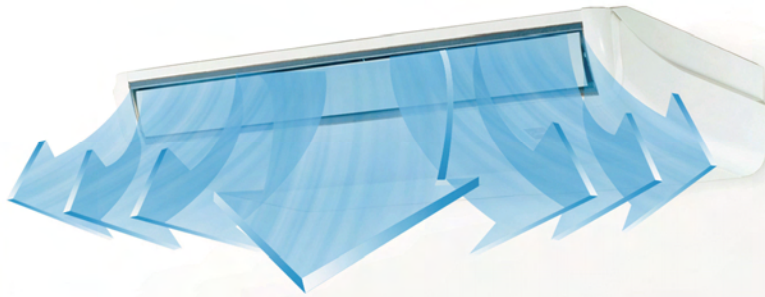

### Specification\_ Ceiling & Floor

Indoor Unit		MUB-36HRD1-Q	MUB-48HRD1	MUB-60HRD1
Outdoor Unit		MOU-36HD1-Q/R	MOU-48HD1	MOU-60HD1
Cooling Capacity	Btu/h	36000	48000	60000
	kW	10.6	14.1	17.6
Heating Capacity	Btu/h	40000	50000	60000
	kW	11.7	14.7	17.6
Power Supply	V~, Hz, Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power Input (W)	Cooling	3290	4400	5410
	Heating	3250	4070	4805
EER	W/W	3.21	3.20	3.25
COP	W/W	3.61	3.60	3.66
Air Flow Volume	m <sup>3</sup> /h	1400/1200/1000	2000/1800/1600	2000/1800/1600
Noise Level (dB(A))	Hi/Med/Low	45/43/40	49/47/46	47/46/44
Net Dimension (mm)	W×H×D	1280x660x203	1670x680x240	1670x680x240
Net Weight	kg	31	46	46
Packing Dimension (mm)	W×H×D	1380x745x297	1765x761x325	1765x761x325
Gross Weight	kg	37	53	54
Piping Size (mm)	Liquid	Φ9.52(3/8")	Φ9.52(3/8")	Φ9.52(3/8")
	Gas	Φ15.9(5/8")	Φ15.9(5/8")	Φ15.9(5/8")
	Drainage	ODΦ25	ODΦ25	ODΦ25
Refrigerant		R410a	R410a	R410a

1.The above design and specifications are subject to change of product improvement without prior notice .  
2.The noise level data reflects the level in anechoic chamber .

### Dealer Details: